

CO2 BAZOOKA

by SALVIN

(1) Unpack the CO2 Bazooka and connect the provided CO2 line/hose. Attach the end with the smaller fitting to the Cryo-Gun. Hand tighten first and then tighten with an adjustable wrench. **Never** use ANY TEFLON tapes .or other pipe treatments to seal connections. All of the tapered (JIC) fittings are self sealing and do not require any help doing their job.



(2) You may use any liquid CO2 supply as long as the pressure is 280 psi or better. **Important** you are using liquid CO2 (LCO2) and not the CO2 gas. What does this mean? Well, CO2 has three forms...gas, liquid and solid (dry ice). We want the liquid for best effect. Either the Bazooka or the Six Shooter can be used with a portable 20 pound tank and back pack. You may also want to attach them to a more long lasting Liquid CO2 Dewar with an optional longer cryo hose! If you are using the 20 pound CO2 tank, commonly called a beverage tank, you can order this two ways from local suppliers (Praxair, Airgas, BOC or a good welding supplier). One way is as a 20 pound beverage tank or as a 20 pound syphon tank (see illustrations). The difference is that you must invert a beverage tank to access the Liquid Co2 while a syphon tank may be placed into the back pack with the valve in the upwards position.



Caution...When using a 20 pound or smaller Co2 cylinder...Never hold the cylinder! I may cause a burns.

After positioning the CO2 tank in a nearby stable location, attach the hose end with the larger fitting to the CO2 tank, making sure the plastic O-ring seal is in place inside the hose fitting. Hand tighten and then tighten with wrench. Don't lose itwe only supply two inserts!



(3) After you make sure all the fittings on the CO2 tank are tight, open the valve on the tank. Check for any leakage.

(4) Depress the trigger on the Co2 Bazooka whenever you want to release Co2. The Co2 Bazooka or will recoil slightly each time the trigger is pulled. Use the safety latch on trigger when not in use.



NOTE: After use, close the valve on the CO2 tank, and bleed any remaining gas in the line through the CO2 Bazooka or CO2 Six Shooter and then you can safely detach the hose from the CO2 tank.



I shouldn't have to say it....but for the record...

"NEVER POINT AND SHOOT AT ANYONE"

308 B RT. 28 KINGSTON, NEW YORK 12401...01-845-340-0489 www.salvin.biz



Whats in you package



- 1- Co2 Bazooka
- 1- Cryo Hose
- 1- Back-Pack
- 1- Confetti Shot
- 1-Streamer Shot

Loading confetti or streamers



Remove confetti and streamers from plastic pouch and load confetti or streamers into barrel of Bazooka until plastic sleeve is empty.

NEVER pack or ramrod product into barrel!




I want to repeat myself...

"NEVER POINT AND SHOOT AT ANYONE"

308 B RT. 28 KINGSTON, NEW YORK 12401...01-845-340-0489 www.salvin.biz

Attaching Back Pack to Tank

Weaving strap through latch to secure tank into Back Pack

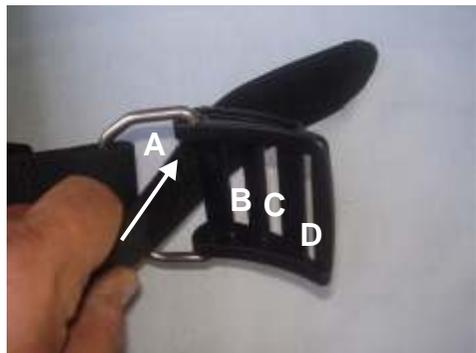

Step # 1
Place strap end into A slot



Step # 2
Out of A and into C slot



Step # 3
Out of C and into B slot



Step # 4
Slide on to tank and pull firmly
(note buckle position is open).



Step # 5
Bring strap back into c slot.
(be careful not to let strap loosen)



Step # 6
Out of C slot and into D slot.



Step # 7
Flip latch to tighten strap (closed position) on to tank.



Step # 8
Secure strap to Velcro



Step #9
Bottom of Co2 valve should be even with top of Back Pack



Just in case you missed it on the last two pages...

"NEVER POINT AND SHOOT AT ANYONE"

308 B RT. 28 KINGSTON, NEW YORK 12401...01-845-340-0489 www.salvin.biz

Property of Salvin Design 3/08/10